



TRANSFORMER COMPONENTS??
ASK ASCO!!



www.ascocomponents.co.uk

info@ascocomponents.co.uk

EI 68

**Lam
58x68**

TYPE	REF.	a	b	c	d	e	f	g	h	x2	x3	s	L	GG	GC	GL	Number of Terminals
EI 68/25	2225T/1-2	22,5	25,0	33,6	43,0	53,0	31,5	14,0	14,0	37,0	10,5	1,6	43,5		■		4x4
EI 68/30	2230T/1-2	22,5	30,0	32,7	44,0	56,5	29,5	14,0	14,0	37,0	10,5	1,6	35,5	■		■	4x4
EI 68/35	2235T/1-2	22,5	35,0	33,5	43,0	61,0	30,9	14,5	14,5	37,0	10,5	1,3	41,5	■			4x5

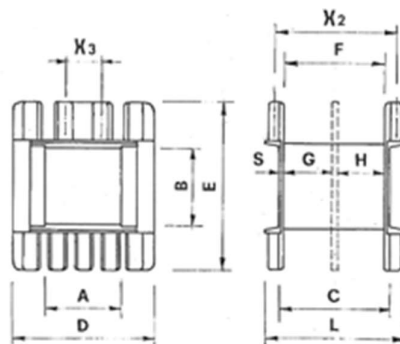

TEMPERATURE AND FLAMABILTY RATINGS OF STANDARD MATERIALS

Material Ref	Base Material	Temperature Class (2000h)	Conforming to standards	UL94
RP3	Nylon6 +30% glass reinforced	F (155°C)	IEC85 ASTM ISO/VDE DIN	HB
RP5	Nylon 6.6 +25% glass reinforced	B (130°C)		V0
RP7	Pet +30% glass reinforced	H (180°C)		V0