

TRANSFORMER COMPONENTS??
ASK ASCO!!

www.ascocomponents.co.uk


sales@ascocomponents.co.uk

EI 240 V FLANGE

Lam 200x240

TYPE	REF.	A	B	C	D	E	F	G	H	S	I	L
EI 240/30	8030V/1-2	81,5	30	119	157	80	113	54,5	54,5	2,2	-	128
EI 240/40	8040V/1-2	81,4	40	119	157	87	113	54,5	54,5	2,2	-	128
EI 240/50	8050V/1-2	81,5	50	119	157	95	113	54,5	54,5	2,2	-	128
EI 240/60	8060V/1-2	81,5	60	119	157	102	113	54,5	54,5	2,2	-	128
EI 240/SPACER	INT80D/EI	-	-	-	-	-	-	-	-	-	50	-

Half bobbins can be mixed to achieve different stack depths.
Spacer can be added to increase stack depth

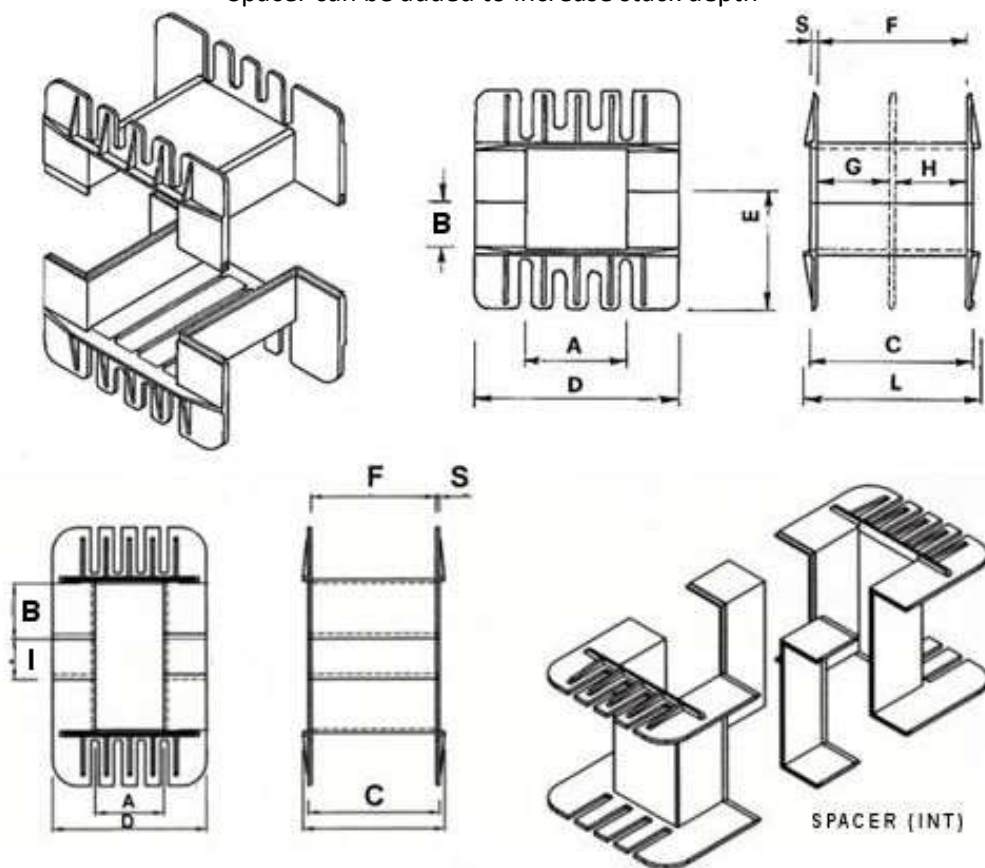

TEMPERATURE AND FLAMABILITY RATINGS OF STANDARD MATERIALS

Material Ref	Base Material	Temperature Class (2000h)	Conforming to standards	UL94
RP3	Nylon6 +30% glass reinforced	F (155°C)	IEC85 ASTM ISO/VDE DIN	HB
RP5	Nylon 6.6 +25% glass reinforced	B (130°C)		V0
RP7	Pet +30% glass reinforced	H (180°C)		V0