



TRANSFORMER COMPONENTS??
ASK ASCO!!

www.ascocomponents.co.uk

sales@ascocomponents.co.uk

UI 300

Lam 300 x 500 / 500 x 500


TYPE	DESCRIPTION	REF.		A	B	C	D	E	F	H	S	L	Z	K	INT	
UI 300	HALF BOBBIN	100300R	TOTAL MEASUREMENTS OF ASSEMBLED BOBBIN	102			199		291	45,3	4,0	318	83,9			
UI 300/100	SPACER TYPE 100X100	INT100100		102	100	298	199	268	291			4,0	318			20
UI 300/110	SPACER TYPE 100X110	INT100110		102	110	298	199	278	291			4,0	318			30
UI 300/120	SPACER TYPE 100X120	INT100120		102	120	298	199	288	291			4,0	318			40
UI 300/130	SPACER TYPE 100X130	INT100130		102	130	298	199	298	291			4,0	318			50
UI 300/140	SPACER TYPE 100X140	INT100140		102	140	298	199	308	291			4,0	318			60
UI 300/150	SPACER TYPE 100X150	INT100150		102	150	298	199	318	291			4,0	318			70
UI 300/160	SPACER TYPE 100X160	INT100160		102	160	298	199	328	291			4,0	318			80
UI 300/....	STACK SPACER EXTENDER	INT100D		ADDING STACK EXTENDER ALLOWS STACK DEPTHS GREATER THAN 160MM TO BE ACHIEVED									4,0			20,0
UI 300	HALF BOBBIN FLANGE	FL100/UI									5,8					



TRANSFORMER COMPONENTS??
ASK ASCO!!

www.ascocomponents.co.uk

sales@ascocomponents.co.uk

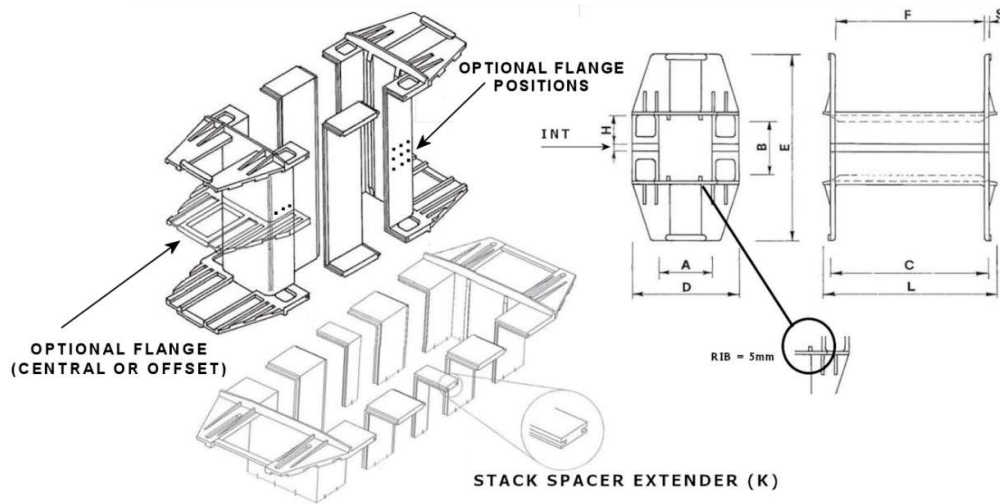

TEMPERATURE AND FLAMABILTY RATINGS OF STANDARD MATERIALS

Material Ref	Base Material	Temperature Class (2000h)	Conforming to standards	UL94
RP3	Nylon6 +30% glass reinforced	F (155°C)	IEC85 ASTM ISO/VDE DIN	HB
RP5	Nylon 6.6 +25% glass reinforced	B (130°C)		V0
RP7	Pet +30% glass reinforced (RYNITE FR530L)	H (180°C)		V0
RP7-L	Pet +30% glass reinforced (ARNITE AV2360S)	H (180°C)		V0